


Canon



imageRUNNER
ADVANCE

6275/6265/6255

Canon's six solutions for high-volume environments

6275



User-Centric

Intelligent Usability.

imageRUNNER ADVANCE was born targeting the ultimate ease of use. Based on customer feedback, that user-centric control has now been further improved. The theme is “intelligent usability.” Expanding the range of the “do-able” and enhancing both the process and the results, Canon puts more fun into the document workflow. The new imageRUNNER ADVANCE strengthens the connection with the business scene.

メインメニュー



カスタムメニュー



状況確認/中止



6275



Main Menu



Select a function.



Show All



Copy



Fax



Scan and
Send



Scan and
Store



Access
Stored Files



Fax/I-Fax
Inbox



Secure
Print



Tutorial

1

2

4

5

7

8

*

0

認証

ID

クリ

リセット



実行/メモリー



Canon's six solutions for high-volume environments:

Usability, High Speed, Color Scan, Sharing, Paper Handling, and Management

High-speed and Multi-functional Operability

01 USABILITY

Large, Legible, Easy to Use

8.4-inch LCD touch panel

Considering the environment, Canon provided an LED as backlight to provide increased illumination. The power key lights up in sleep mode to act as the power-saving key, allowing intuitive understanding of sleep mode and operation resumption.



Power-saving key

Changeable Button Display for Easier Use

Main Menu customization

The number of buttons and their display sequence on the Main Menu can be customized according to everyday work needs. It supports efficient operation with fewer errors and less delay.



One-Touch Control Improves Efficiency

Custom Menu

Frequently used settings, such as "2 on 1/2-sided" or "Compact PDF/OCR," can be combined and registered for individual users. The target job can be performed with one-touch control.



[Actual size]

Point

Handles High-Volume Output with Ease

High-capacity toner and continuous run

The high-capacity toner bottle allows high-volume output of about 56,000 sheets (out of 6% A4 original). Moreover, continuous run allows toner replacement while the device is in operation. The animated screen guides users through toner replacement, making the process simple even for novices.



Animated screen (toner replacement)



Toner replacement screen

Fast Operation from Power ON

High-Speed Start at Power ON*

With "High-Speed Start at Power ON," screen operation can be performed within seven seconds of switching on the main power supply. The warm-up time is also reduced to less than 30 seconds and total copy workflow efficiency raised.

Prevention of Forgotten Originals

DADF paper ejection light

The paper ejection light has become a standard feature. After scanning, the paper ejection light illuminates to prevent users from forgetting the original.




Color Universal Design (CUD) Certification Mark

This product has received the Color Universal Design (CUD) certification mark from the non-profit Color Universal Design Organization (CUDO) attesting that it can convey information to any user regardless of their color perception.



Productivity Support to High-Volume Document Work

02 COPY

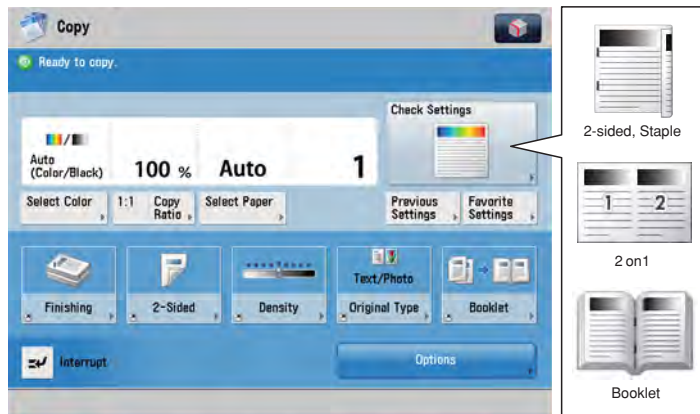

Copy screen allows easy confirmation of current settings.
Copy speed is 75 sheets per minute (A4 landscape).^{*1} It supports a wide variety of copy needs.

Quick Response for Print Jobs

Approx. 3-second First-Copy-Out time

By streamlining the before-copy process, high-speed performance is further improved to deliver first copy output in 3.1 seconds.^{*2*} It offers instant response to urgent copy needs.

Preset Operation Raises Copy Workflow Efficiency


Favorite Settings and Previous Settings

Saving time and effort for each copy, the Favorite Settings function allows users to register frequently used settings. The Previous Settings key is also handy, recalling up to three registered copy settings.

Double Copy Processing Efficiency

Job Clustering

With multiple units connected to the same network, one job can be output simultaneously from two printers, almost doubling copy efficiency. If an error occurs on one printer, the other unit finishes the job output.

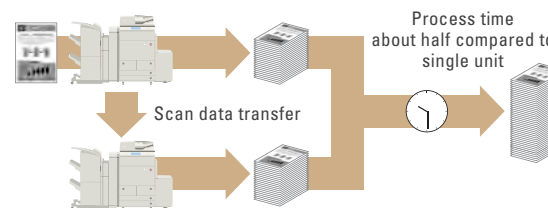


Efficient Use of Copy Time


Reserving Copy Jobs

Up to 20 different copy jobs can be reserved, even when the printer is operating. Reserved copy jobs start automatically, so the user can return to their desk and make more effective use of copy time.

[Without Reserving Copy Jobs]

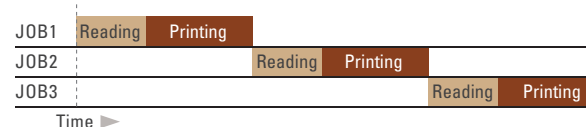

[With Reserving Copy Jobs]

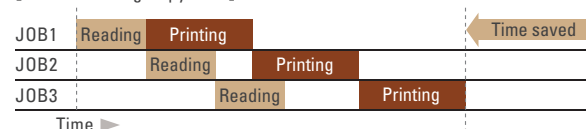

Easy-To-Read Finishing Reduces Costs


N on 1

Select a layout from 2 on 1, 4 on 1 or 8 on 1, and multiple originals can be aggregated on one sheet of paper. The result is one easy-to-read document and reduced paper costs.

Simultaneous Processing of Jobs with Different Settings

Merge Job Blocks

Several originals with different settings can be copied successively and output together. For example, single-sided originals can be copied to double-sided copies, and then single-sided originals copied to 4 on 1 and stapled.

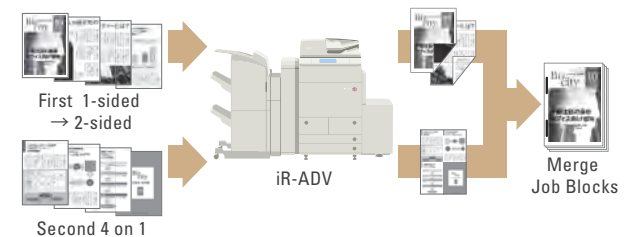

Instant Copies Even in Mid-Operation

Interrupt Copy


Users can temporarily stop the current job and give priority to a rush copy without stress. It also supports print and fax interrupt.

^{*1} 6275 model only. 6265 model: 65 sheets/min; 6255 model: 55 sheets/min (all A4 landscape). ^{*2} 6275 model only. 6265/6255 models: 3.3s. Using the ADF, 6275 model 5.9s, 6265/6255 models 6.2s. Based on Canon's measurements. ^{*3} When read from glass platen: A4 be compatible with standard settings in December 2012. ^{*5} Requires PS Printer Kit-AV1. ^{*6} Requires LIPS V Printer Kit-AV1. ^{*7} Requires PS Printer Kit-AV1 or LIPS V Printer Kit-AV1. The device type needs to be downloaded from the SAP website after member log-in. ^{*8} Sold

Finish as an Easy-to-Read Booklet


Booklet

This function allows users to create saddle-stitch bound booklets by automatically copying originals to double-sided copies and then binding them with the saddle-stitch finisher.

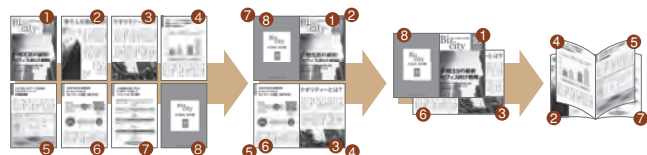

- Finish jobs more efficiently with Collate/Group/Staple
- Add page numbers, etc., with Page Numbering
- Prevent unauthorized copying with Watermark/Print Date
- Receive E-mail notification of job completion with Job Done Notice
- Remove shadows, adjust printing position, etc., with Erase Frame/Shift/Gutter
- Synthesize images and form data such as logos with Superimpose Image
- Check copy settings with partial output only: Copy Sample
- Streamline job-data storage and repeat output with Store in User Inbox
- Confirm secure setting of an original with Scan Image Check
- Secure Watermark is a standard function to prevent piracy

03 PRINT

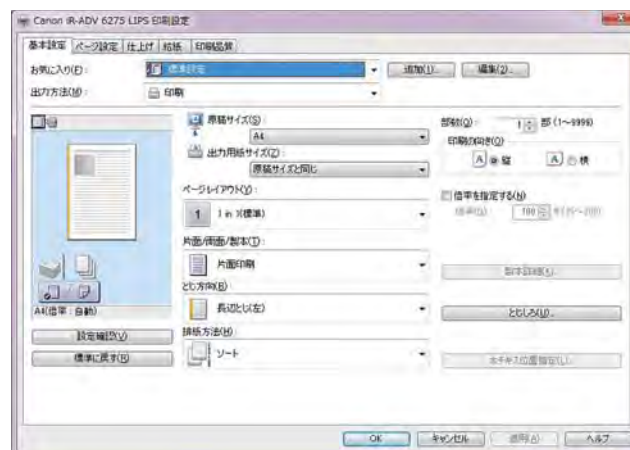

An easy-to-use, graphical user interface is provided. The print driver*⁴ efficiently performs a variety of functions including paper selection, paper source and finishing.

Selectable PDL According to the OS and the Kind of Work

Multi-PDL compatible

Depending on the office needs, the OS, work contents, etc., users can choose from multiple page description languages (PDLs) including Canon proprietary LIPS LX, which realizes high-speed data processing, Adobe® PostScript®³TM*⁶ and LIPS V*⁷ that provides backwards compatibility with LIPS.

LIPS LX

Output with Form System


SAP Form Printing Solution*⁷

Compatible with device types that conform to the SAP Printer Vendor Program. SAP system users can take advantage of a variety of iR-ADV 6200 Series print functions, including finishing. Moreover, users can retrieve data from the SAP ERP server, use the form system to create a printing layout and then output.

From Edit to Output on a Computer

imageWARE Desktop*⁸


Data created by using a variety of applications can be integrated into a single file. Users can edit, change orders, delete pages, check the finished product in preview, and then output. You will be able to complete all work efficiently on your computer to print.

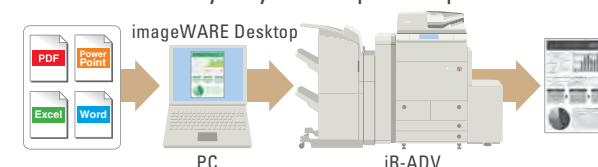

Print from a Smartphone or Tablet PC


Canon Mobile Printing*⁹

Printing web pages or PDF files from mobile devices connected to wireless LAN access points is easy, using the iPhone- and iPad-compatible print application.

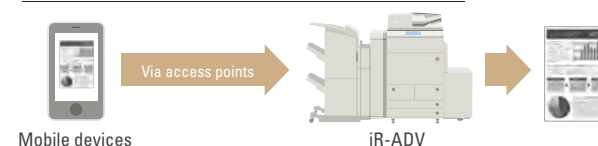

Reliable Support of Data Sharing, Transmission and Reception

04 FAX

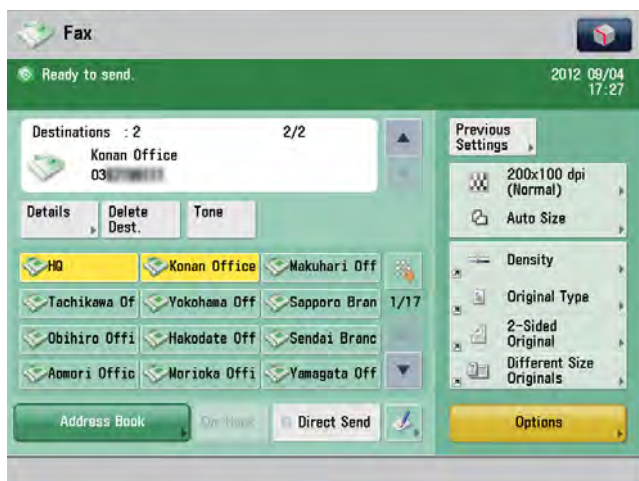

The simple dedicated fax screen offers the same smooth operation as a dedicated fax machine. Super G3 fax delivers*1 a maximum transmission speed of 33.6kbps, or high-speed 2-second communication.

Prevention of Wrong Transmission for Improved Confidentiality

Fax security


Wrong transmissions are prevented by the Confirm Entered Fax Number function and the Access Number Management function. Moreover, it conforms to FASEC1, the fax security function guideline for business use.



Paperless for Reduced Costs

Fax driver

The fax driver enables users to send paperless faxes from a computer. In addition to reducing paper costs, it also ensures that there are no smudges or blurs. It also enables efficient fax log management.

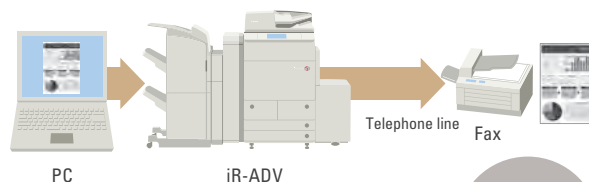


Point


More Efficient Paperless Fax

Fax Transfer and File Automatic Organize Tool*2

Fax documents transferred to the Advanced Box in the main unit, where they can be accessed and viewed from a desktop computer. Moreover, using the File Automatic Organize Tool, incoming fax documents can be automatically distributed and stored in folders created daily.

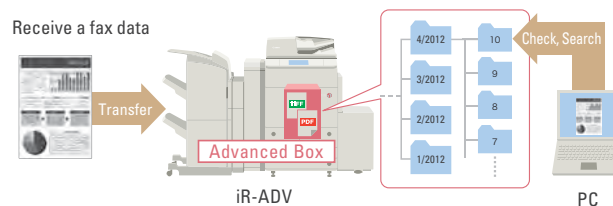

05 SCAN & SEND

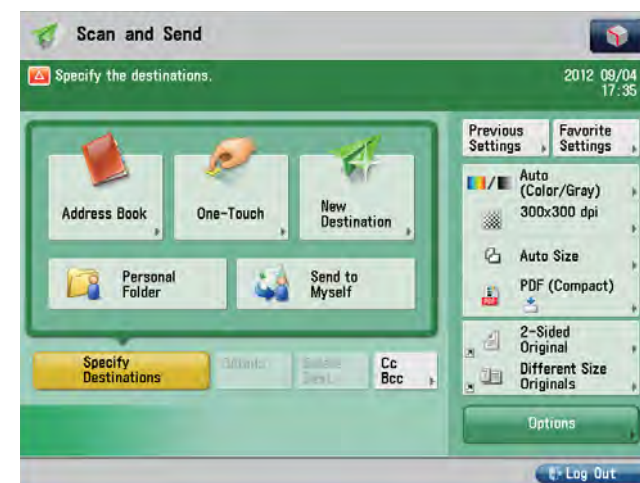

Address specification and other setup operations are easy to perform on the Scan and Send screen. Registering key sequences in the Favorite Settings (top right) further enhances operating efficiency. My Folder and Send to Myself buttons are also convenient.

Point

Scan in Full Color at High Speed

High-speed color scan

This B/W multifunction printer offers color-scan features. It can scan a double-sided document simultaneously at a rapid rate of 100 A4 color pages per minute and 200 B/W pages per minute (both at 300dpi). It allows effective use of full-color information.

Various Type of PDF Files Point such as Encrypted PDF

Adobe® PDF compatible

Encrypted PDF allows only authorized users with passwords to open the files, resulting in improved security. Moreover, a variety of PDFs can be generated: Compact PDF compresses the data capacity to approx. one tenth, reducing the load on networks and servers, while Searchable PDF*³ uses OCR processing to enable a full text search, etc.


■ Encrypted PDF



Scanned Documents can be Used as Microsoft PowerPoint Files

Office Open XML compatible*³


During scanning, text data is added by OCR processing and graphic data by outline processing to create Office Open XML compatible files. Scanned documents can be used as Microsoft PowerPoint files. The time and labor required to input and edit paper document data are sharply reduced. It also promotes paper recycling.

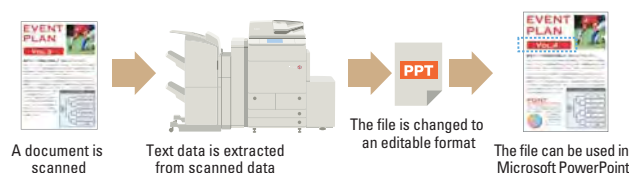

Variety of Document-Sending Options

Supports multiple protocols

SMB Send function allows users to share information within an office without using any server. Sending with FTP/WebDAV protocols is also supported. Documents can also be sent by E-mail with a variety of settings in the similar way as on computers.

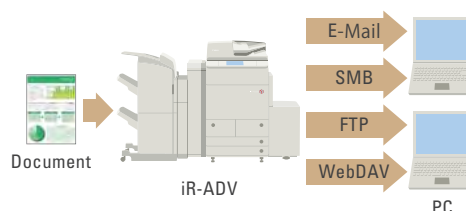


06 STORAGE

Create a Serverless Document-Sharing Environment

Advanced Box*⁴

Advanced Box uses dedicated hard disk space on the printer for document sharing with SMB and WebDAV protocols. It enables document sharing between the imageRUNNER ADVANCE and computers on the same network without having to go through servers. It also allows users to preview images of documents using the touch panel.

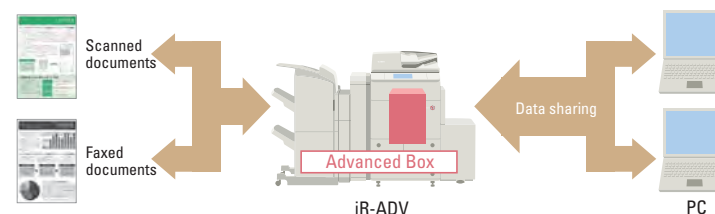

Print Out Documents as Needed

User Box


Storing scanned documents in the User Box makes it easy to print out repeatedly as necessary. The preview images allow quick and easy browsing of stored documents.



Easily Save Scanned Data to a USB

USB thumb drive

The imageRUNNER ADVANCE has USB ports on its side, allowing users to save scanned data onto USB thumb drive or to print out data*⁵ from USB thumb drive with ease.

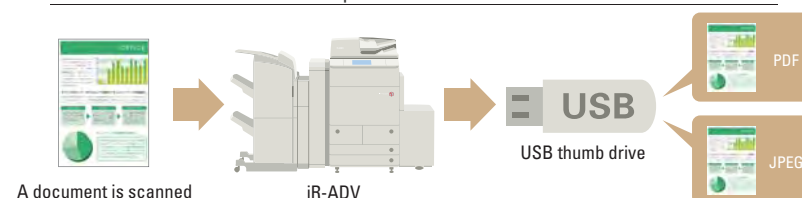

Flexibility to Expand Paper Feeding, Improve Management Efficiency

07 PAPER HANDLING

Full Range of Optional Accessories **Point** to Improve Productivity

Offers Six-way paper feeding with a 8,860-sheet maximum capacity and a variety of finishing options

Automatic Document Feeder

Offers a paper capacity of 300 sheets (64g/m²). Capable of simultaneously scanning both sides of a document. Document reading is improved by the new faster original document tray lifter.

Booklet Finisher-P1

The finisher delivers advanced in-line finishing capabilities with two output trays. It provides a 50-sheet staple capacity (64g/m²), supporting corner, double, and saddle stitch stapling.

Price (w/o tax) 420,000 yen

External 2 Hole Puncher-A1

The puncher needs to be attached along with the Staple Finisher-P1 or Booklet Finisher-P1 and brings punching capabilities to register 2 punch holes on the output.

Price (w/o tax) 60,000 yen

Document Insertion/ Folding Unit-H1

Paper folding unit supporting Z-folds and C-folds with a cover inserter as one system.

Price (w/o tax) 800,000 yen

※Requires attachment along with Staple Finisher-P1 or Booklet Finisher-P1. Power supply is separate from the Main Unit.

- Z-Fold folds paper into a compact form
- C-Fold is handy when inserting sheets into envelopes, etc.
- Punch function is useful for filing



Shift Tray-E1

The tray allows shift output for each department.
Price (w/o tax) 85,000 yen

Copy Tray-Q1

The tray can be installed on the left side of the Main Unit with a paper capacity of 250 sheets (64g/m²).
Price (w/o tax) 10,000 yen

Paper Deck (Standard)

The standard paper decks provide a paper capacity of 1,700 sheets (64g/m²).

2 x 680-Sheet Cassettes (Standard)

The standard paper cassettes provide a paper capacity of 680 sheets (64g/m²) per cassette.

Stack Bypass (Standard)

The Stack Bypass provides a paper capacity of 100 sheets (64g/m²).

Paper Deck Unit-D1

This deck holds up to 4,000 A3-sized sheets (64g/m²). It reduces time and labor required for paper supply, and has the capacity to respond to high-volume booklet output or large-sized output.

Price (w/o tax) 400,000 yen

Staple Finisher-P1

This finisher provides a 50-sheet staple capacity (64g/m²), supporting corner and double stapling.

Price (w/o tax) 280,000 yen

Paper Deck Unit-A1

It can be installed on the right side of the Main Unit, holding up to 4,000 A4-sized sheets (64g/m²) to meet volume printing needs.

Price (w/o tax) 230,000 yen


* This photo shows the imageRUNNER ADVANCE 6275 model with the Booklet Finisher-P1, External 2 Hole Puncher-A1, Document Insertion/ Folding Unit-H1, Paper Deck Unit-D1

08 MANAGEMENT

Reduce Configuration **Point** and Operation Overhead

Remote UI and Remote Operation


Remote UI enables integrated management from a desktop computer of all print function settings and of the Advanced Box. Furthermore, the Remote Operation function makes it possible to remotely operate the printer from a desktop computer using the same user interface as provided on the printer itself. It supports prompt management and operation in response to inquiries from a remote location.

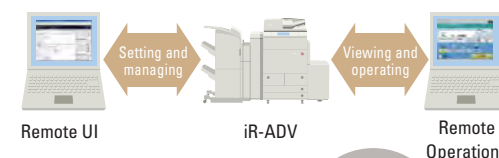

Remote Power Off **Point** All Devices

Remote Shutdown

Remote UI allows users to turn off the power to the imageRUNNER ADVANCE from the computer. Functions such as imageWARE Management Agent enable simultaneous shut down at a specified time. In addition to reducing management overhead during legal inspections, for example, it also contributes to the reduction of power costs during long vacations.

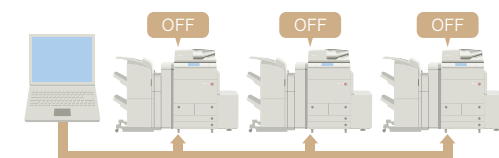

Enhance Security while Reducing Costs

Point

IC Card Authentication Pro for MEAP ADVANCE*1*2


This system improves efficiency by enabling personal authentication using existing IC cards such as employee cards.*3 Security is improved while costs are reduced by the limitations imposed on users and functions.



Simple Management of Output for Each Department

Department ID Management

This feature enables output management and output volume control for copying, scanning and printing by each department, group, etc. Up to 1,000 departments can be registered and accessed by Department ID and PIN number, making management and control simple.

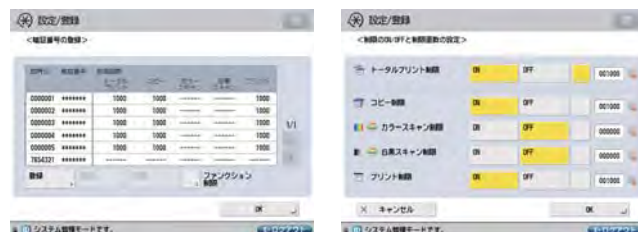

Print from Any Device to Avoid Unnecessary Prints and Unattended Print-outs

Point

Serverless Anyplace Print for MEAP ADVANCE*1

Print data is temporarily held in the Advanced Box. Combined with IC-card authentication, this enables secure and serverless printing from any imageRUNNER ADVANCE in the same network. It prevents unattended print-outs and reduces unnecessary prints because users only see their own job-list displayed.




Prevent iR-ADV from Moving when Quake

Anti-Earthquake Kit*1

The Anti-Earthquake Kit lessens the chance of the iR-ADV and its peripherals moving or falling in an earthquake and causing injury or becoming an obstacle to evacuation. There are two types: a simple-caster type that can be easily installed without fixing, and a fixed type for long-duration earthquakes.

■ Simple-Caster Type

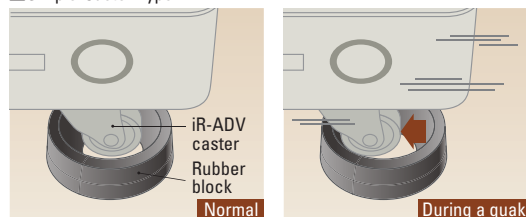

The iR-ADV casters fit within rubber blocks.

Friction prevents the iR-ADV casters from riding up the side of the rubber blocks.

09 SECURITY

Prevent Data Leaks Caused by Unauthorized Copying

Point

Secure Watermark

The standard feature Secure Watermark copies a pattern onto the background of the original. Since the background pattern emerges in subsequent copies, it effectively prevents unauthorized copying.



Point

Increasing the Confidentiality of Job Data

Erasing all data stored on the hard disk

Digital data generated on the hard disk drive when copying or printing documents is overwritten as soon as the job is finished. Moreover, it also features a hard disk drive lock function to prevent unauthorized access to internal hard disk drive data.

Minimize the Risk of an Information Breach from the iR-ADV

Hard disk drive data encryption*4

By encrypting the data inside the hard disk drive, the risk of information being compromised if the printer is stolen or a similar case occurs is minimized. For hard disk drive data encryption, the iR-ADV contains a Canon MFP Security Chip with ISO15408 (Common Criteria) certification (EAL3), guaranteeing proper evaluation of its security performance.

Safety with International Security Certification

IEEE 2600*5

This device is compliant with the international standard on information security for multifunction printers, IEEE Std. 2600TM-2008.

SPECIFICATION

Main Unit				
Model Name	IR-ADV 6275		IR-ADV 6265	
Type	Console			
Resolution (Scan)	600 dpi × 600 dpi			
Resolution (Print)	1200 dpi × 1200 dpi			
Halftone	256 gradations			
Acceptable Originals	Maximum size: A3 sheet, Book, Three-dimensional objects (maximum approx. 2 kg)			
Paper Size	A3, B4, A4, A4R, B5, B5R, A5R, Postcard ^{*1*6} , Double Postcard ^{*1*6} , Quarter-dividable Postcard ^{*1*6} , Custom size (100 mm × 148 mm to 297 mm × 487.7 mm)			
	Margins	Full circumference:2.5 mm		
	Paper Weight	Cassette:52 to 220 g/m ² , Stack Bypass:52 to 256 g/m ²		
Warm-Up Time	From Power on	30 sec. or less (temperature:20 deg C) *When switching "High-Speed Start at Power ON" is set, then key operation on the touch panel display can be used within 7 seconds. High-Speed Start may not start depending on usage. When it contains with 1TB Hard Drive, the Warm-Up Time for "High-Speed Star" is longer.		
	From Sleep Mode	30 sec. or less (temperature:20 deg C)		
First-Copy-Out time ^{*2}		3.1 sec.	3.3 sec.	
Copy/Print Speed	A3	37 ppm	32 ppm	32 ppm
	B4	45 ppm	39 ppm	39 ppm
	A4	75 ppm	65 ppm	55 ppm
	B5	75 ppm	65 ppm	55 ppm
Magnification	Regular Paper Size	1:1±0.5 %, 1.15, 1.22, 1.41, 2.00, 4.00, 0.87, 0.82, 0.71, 0.61, 0.50, 0.25		
	Copy Ratio	25 to 400 % (in increments of 1 %)		
Paper Feeding System/ Capacity (64 g/m ²)	Cassette	680 sheets × 2		
	Stack Bypass	100 sheets (continuous document feeding)		
	Deck	1,700 sheets × 2 + 4,000 sheets × 2 (Paper Deck Unit-A1 ^{*3} or Paper Deck Unit-D1 ^{*3})		
Multiple Copies	9,999 sheets			
Power Requirement	100 V AC, 15 A, common to 50 Hz and 60 Hz			
Maximum Power Consumption	1.5 kW or less			
Standard Power Consumption (TEC) ^{*4}	6.08 kWh		5.57 kWh	4.86 kWh
Dimensions (Main Unit + DADF)	645 mm(W) × 770 mm(D) × 1,220 mm(H)			
Weight (includes DADF)	Approx. 234 kg			
Installation Space ^{*5}	1,362 mm(W) × 770 mm(D)			
Memory Capacity	RAM/standard: 1.5 GB, maximum: 2 GB, HD/standard: 160 GB, maximum: 1 TB			
Additional Functions	Automatic Paper Selection, Auto Collate, Auto Orientation, Reserving Copy Jobs (up to 20 jobs), Interrupt Copy, Original Type Selection (Text/Photo, Photo, Text), Density Adjustment (Manual), Background Adjustment (Automatic/Manual), Finishing (Collate, Group, Rotate), 2-Sided, 2-Page Separation, Cover (Front cover/Back cover), Sheet Insertion (Chapter Page/Index page), Booklet, Transparency Interleaving, Image Combination (2 on 1/4 on 1/8 on 1), Shift, Margin, Frame Erase(Original Frame Erase/Book Frame Erase/Binding Erase), Job Done Notice, Different Size Originals, Job Build, Scan Image Check, Image Creation (Nega/Posi, Image Repeat, Mirror, Area Designation), Sharpness, Form Composition, Job Lock ^{*3} , Secure Watermark, Page/Copy Set Numbering, Watermark/Print Date, Job Block Combination, Store in User Inbox, Job Clustering, Recall (interpolated 3 previous jobs), Mode Memory (interpolated 9 jobs), etc.			

*1 Available in Stack Bypass only. *2 A4 landscape set on platen, paper selection from right side paper deck of the Main Unit and delivered to copy tray. *3 Optional. *4 Figures from measurement method defined under the International ENERGY STAR Program. *5 When extending the Stack Bypass to the maximum length. *6 Japan Post postcards

Duplex Color Image Reader Unit-G1 (Standard)		
Type	Duplex Automatic Document Feeder	
Original Size /Types	A3, B4, A4, A4R, B5, B5R, A5, A5R, B6R	
Original Capacity	1-sided original:38 to 220 g/m ² , 2-sided original:50 to 220 g/m ² (B/W), 64 to 220 g/m ² (color)	
Scan Speed (A4R)	300 sheets (80 g/m ²)	
	Copying	1-sided Scan:120 ipm (B/W) 2-sided Scan:120 ipm (B/W)
	Scanning (300 dpi)	1-sided Scan:85 ipm (color), 120 ipm (B/W) 2-sided Scan:100 ipm (color), 200 ipm (B/W)

Advanced Box (Standard)	
Disk Space	Standard:15 GB, maximum:629.2 GB
Maximum Path Length	256 byte
Maximum Number of File per Directory	Interpolated 1,000 files (including folders)
Maximum Number of Files	Interpolated 100,000 files (including folders)
Maximum File Size	Interpolated 2 GB
Maximum Number of Clients for Simultaneous Access	SMB:32/WebDAV:12
Client OS	Windows® 2000/Windows® XP/Windows Vista®/Windows® 7

LIPS LX Printer (Standard)	
Type	Embedded
Print Size	Based on the specifications of Main Unit
Print Speed	Based on the specifications of Main Unit
Resolution	Data Process 1200 dpi × 1200 dpi*1, 600 dpi × 600 dpi
	Print 1200 dpi × 1200 dpi
Page Description Language	LIPS LX
Supported Protocol	TCP/IP (LPD/Port9100/IPP/PPS/SMB/FTP/WSD), IPX/SPX (NDS, Bindery)
Supported OS	Windows® XP/Windows Vista®/Windows® 7/Windows® Server 2003/Windows® Server 2008, Mac OS X (10.5.8 or later)
Standard Font	N/A
Emulation	Standard BMLinkS, TIFF/JPEG Direct Print
	Option PDF/XPS Direct Print*2
Interface	USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)
Margins	5 mm in all directions Engine margin selectable in printer driver

*1 Text/Line Only *2 When installing the Direct Print Kit (for PDF/XPS)-J1

PS Printer (Option)	
Name	PS Printer Kit-AV1
Type	Embedded
Print Size	Based on the specifications of Main Unit
Print Speed	Based on the specifications of Main Unit
Resolution	Data Process 1200 dpi × 1200 dpi*, 600 dpi × 600 dpi
	Print 1200 dpi × 1200 dpi
Page Description Language	Adobe® PostScript® 3™
Supported Protocol	TCP/IP (LPD/Port9100/IPP/PPS/SMB/FTP/WSD), IPX/SPX (NDS, Bindery)
Supported OS	Driver Windows® XP/Windows Vista®/Windows® 7/Windows® Server 2003/Windows® Server 2008, Mac OS X (10.5.8 or later)
	PPD Mac OS 9 (9.1 or later), Mac OS X (10.3.9 or later)
Standard Font	Japanese Heisei-Mincho-W3, Heisei-Kaku-Gothic W5
Alphabet	136 font types
Emulation	N/A
Interface	USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)
Margins	4 mm in all directions Engine margin selectable in printer driver

* Text/Line Only

LIPS V Printer (Option)	
Name	LIPS V Printer Kit-AV1
Type	Embedded
Print Size	Based on the specifications of Main Unit
Print Speed	Based on the specifications of Main Unit
Resolution	Data Process 1200 dpi × 1200 dpi*1, 600 dpi × 600 dpi
	Print 1200 dpi × 1200 dpi*1
Page Description Language	LIPS V (LIPS LX, LIPS IV, LIPS III, LIPS II+)
Supported Protocol	TCP/IP (LPD/Port9100/IPP/PPS/SMB/FTP/WSD), IPX/SPX (NDS, Bindery)
Supported OS	Windows® XP/Windows Vista®/Windows® 7/Windows® Server 2003/Windows® Server 2008, Mac OS X (10.5.8 or later)*2
Standard Font	Japanese Heisei-Mincho-W3, Heisei-Kaku-Gothic W5, Round Gothic
	Alphabet Courier, Swiss, Dutch, Symbol, All four font types and thirteen sets
Other	Barcode (EAN-128, CODE39, NW-7, JAN, Postal Barcode, OCR font)
Emulation	ESC/P, N201, IBM5577, HP-7550B, HP-GL, HP-GL2, BMLinkS, TIFF/JPEG Direct Print
Interface	USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)
Margins	5 mm in all directions Engine margin selectable in printer driver

*1 When using LX Driver, Text/Line only *2 LIPS LX only

Paper Deck Unit-A1 (Option)	
Paper Size	A4, B5
Paper Weight	52 to 220 g/m ²
Paper Capacity/Number of Available Cassette	4,000 sheets (64 g/m ²) × 1 Cassette
Maximum Power Consumption	Main Unit/approx. 39 W
Dimensions/Weight	323 mm(W) × 583 mm(D) × 570 mm(H)/approx. 37 kg
Installation Space with Main Unit*	1,393 mm(W) × 770 mm(D)

* When extending the Stack Bypass to the maximum length

Paper Deck Unit-D1 (Option)	
Paper Size	A3, B4, A4, A4R, B5
Paper Weight	52 to 220 g/m ²
Paper Capacity/Number of Available Cassette	4,000 sheets (64 g/m ²) × 1 Cassette
Maximum Power Consumption	Main Unit/approx. 39 W
Dimensions/Weight	601 mm(W) × 621 mm(D) × 570 mm(H)/approx. 57 kg
Installation Space with Main Unit*	1,671 mm(W) × 770 mm(D)

* When extending the Stack Bypass to the maximum length

Copy Tray-Q1 (Option)	
Available Paper Size/Type	Based on the specifications of Main Unit
Capacity	250 sheets (64 g/m ²)
Dimensions/Weight	420 mm(W) × 382 mm(D) × 175 mm(H) (When extending auxiliary tray)/approx. 1.1 kg
Installation Space with Main Unit*	1,362 mm(W) × 770 mm(D)

* When extending the Copy Tray and the Stack Bypass to the maximum length

Pull Scan Functions (Standard)	
Type	Color scanner
Maximum Scan Size	Based on the specifications of Main Unit
Resolution (Main Scan × Sub Scan)	75, 150, 200, 300, 400, 600 dpi (adjustable in increments of 1 dpi from 75 to 600 dpi)
Interface	Ethernet 1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)
Supported Protocol	TCP/IP
Supported OS	Windows® XP/Windows Vista®/Windows® 7/Windows® Server 2003/Windows® Server 2008
Driver	TWAIN-compliant
Image Mode	Auto Switch between Color and B&W, Color, B&W, Gray Scale

* In a 64-bit environment, TWAIN applications that can run in 32-bit virtual mode are only supported.

Super G3 Fax Functions	
Name	Super G3 Fax Board-AL1 (single line board)
Applicable Line*1	General telephone line, PSTN X1(interpolated 4 lines available using extension kit), FAX Line
Scanning Line Density	Standard Mode 8 dot/mm × 3.85 line/mm
	Fine Mode 8 dot/mm × 7.7 line/mm
	Super Fine Mode 8 dot/mm × 15.4 line/mm
	Ultra Fine Mode 16 dot/mm × 15.4 line/mm
Communication Speed	Super G3:33.6 kbps, G3:14.4 kbps
Encoding System	MH, MR, MMR, JBIG
Communication Mode	Super G3, G3
Original Size	A3 (297 mm × 420 mm)
Printable Paper Size	A3, B4, A4, A4R, B5, B5R, A5, A5R
Transmission Time	Approx. 2.6 sec.Using A4, Canon original paper, Standard mode, ECM (JBIG) Sending
Fax Driver	Interface USB2.0 High-Speed,1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)
	Supported Protocol TCP/IP (LPD/Port9100/SMB/WSD), IPX/SPX (NDS, Bindery)
	Supported OS Windows® XP/Windows Vista®/Windows® 7/Windows® Server 2003/Windows® Server 2008, Mac OS X (10.5.8 or later)
Other Features	One Touch Button:200 items*2, Address Book:1,600 destinations*2, Broadcast Sending:interpolated 256 destinations, Reserving Jobs:interpolated 64 jobs, Available Sending Functions:Rotation Sending, Manual Sending, Memory Sending, Direct Sending, Line Designation, Senders Log, Sender Name (100 names), Job Done Notice*3, Fax Number Check, F-code, Password, Available Receiving Functions:Rotation Receiving, 2-sided Printing, Cassette Selection, Image Reduction, Receiving Log, 2on1 Log, Tel/Fax Auto Switching, Manual Receiving*3, On-hook, Remote Receiving, Output Tray Designation, Dial-in Receiving (Two destinations per one line)

*1 In case of Voip(Voice Over IP) line, data transmission is performed for each packet. However, fax communication may fail due to the loss of packet. Recommend to use fax via general telephone line(subscribed telephone/Fnet). *2 One Touch and Address Book is common to the address book used for sending file or mail. *3 Optional



Push Scan Functions (Standard)		
Type	Color scanner	
Maximum Scan Size	Based on the specifications of Main Unit	
Resolution (Main Scan × Sub Scan)	100 × 100 dpi, 150 × 150 dpi, 200 × 100 dpi, 200 × 200 dpi, 200 × 400 dpi, 300 × 300 dpi, 400 × 400 dpi, 600 × 600 dpi	
Scan Speed (A4R,300 dpi)	85 ipm (Color), 120 ipm (B/W)	
Interface	1000Base-T/100Base-TX/10Base-T (IEEE 802.3-compliant)	
Supported Protocol	SMB (TCP/IP)*, FTP (TCP/IP)*, SMTP (TCP/IP)* ² , WebDAV* ³	
Supported OS/ Application	SMB	Windows®2000/Windows®XP/Windows Vista®/Windows®7/Windows®Server 2003/Windows®Server 2008, Samba 2.2.8/3.0 (Mac OS X 10.5/10.6, RedHat Linux9.0, Solaris 10)
	FTP	Microsoft Internet Information Server Version 5.0/5.1/6.0/7.0/7.5, Mac OS X 10.5/10.6, RedHat Linux9.0, Solaris 10
	WebDAV	Microsoft Internet Information Server Version 5.0/5.1/6.0/7.0/7.5, Apache2 (Mac OS X 10.5/10.6, RedHat Linux9.0, Solaris 10)
	SMTP	Microsoft Exchange 2003 SP2, Microsoft Exchange 2007 SP2, Sendmail 8.14.4, Lotus Domino R7.0
Output Format	Single Page	TIFF (MMR)/JPEG/PDF/XPS/OOXML (PowerPoint)* ⁴
	Multiple Pages	TIFF (MMR)/PDF/XPS/OOXML (PowerPoint)* ⁴
Image Mode	Text, Text/Photo, Photo	
Additional Functions	Compact PDF/XPS, PDF (Optimize for Web), PDF (Apply Policy), PDF/A-1b, PDF with Reader Extensions ⁴ , PDF (Trace & Smooth)* ⁴ , Encrypted PDF* ⁴ , Searchable PDF/XPS (OCR)* ⁴ , Device Signature PDF* ⁴ , User Signature PDF* ⁴ , Time Stamp PDF* ⁴	

*1 The optional Additional Memory Type D (512 MB) is required to scan in Auto (Color/BW), Full Color, or Gray scale at resolution of 200 × 400, 400 × 400, or 600 × 600 dpi. *2 Supporting the encrypted communication (SSL) for SMTP authentication or SMTP sending. *3 Supporting encrypted communication (SSL). *4 Optional

Shift Tray-E1 (Option)		
Available Paper Size/Type	Based on the specifications of Main Unit	
Tray Capacity	Sort: 500 sheets (64 g/m ²), Non-Sort: 250 sheets (64 g/m ²)	
Dimensions/Weight	366 mm(W) × 547 mm(D) × 256 mm(H) /approx. 4.2 kg	
Installation Space with Main Unit*	1,308 mm(W) × 770 mm(D)	

* When extending the Stack Bypass to the maximum length

Internet/Intranet Fax Functions (Standard)		
Protocol	Internet Fax	SMTP* ¹ (Send)/POP3* ² (Receive)
	Intranet Fax	SMTP* ¹ (Send/Receive)
Communication Mode	Simple Mode, Full Mode (ITU-T T.37-compliant or W-NET Fax-compliant)	
Original Size	A3, B4, A4 (A3 and B4 size depends on the destination's settings.)	
Resolution/B/W	200 × 100 dpi, 200 × 200 dpi, 200 × 400 dpi* ³ , 300 × 300 dpi* ³ , 400 × 400 dpi* ³ , 600 × 600 dpi* ³	
Supported Mail Server	Microsoft Exchange 2003 SP2, Microsoft Exchange 2007 SP2, Sendmail 8.14.4, Lotus Domino R7.0	

*1 Supporting the encrypted communication (SSL) for SMTP authentication and SMTP sending. *2 Supporting the encrypted communication (SSL) for APOP/POP before SMTP or POP receiving. *3 Depending on the receiver's setting

External 2 Hole Puncher-A1 (Option)		
Paper Size	A3, B4, A4, A4R, B5, B5R	
Paper Weight	52 to 256 g/m ²	
Paper Type	Thin, Plain, Recycled, Color, Heavy1 (91 to 180 g/m ²), Heavy2 (181 to 220 g/m ²), Heavy3 (221 to 256 g/m ²), Coated* ¹ , Index	
Number/Diameter of Punch Hole	Two holes/6.5 mm	
Interval between Punch Holes	80 mm	
Punch Holes Waste Capacity	Approx. 10,000 sheets (80 g/m ²)	
Maximum Power consumption	Main Unit/25 W	
Dimensions/Weight	107 mm(W) × 615 mm(D) × 825 mm(H)/ approx. 7.7 kg	
Installation Space with Main Unit* ²	1,820 mm(W) × 770 mm(D)	

*1 Coated sheets can only be used when feeding from the inserter. *2 When extending the Stack Bypass and Finisher Tray to the maximum length

Document Insertion/Folding Unit-H1 (Option)		
Paper Size/ Paper Type	C-Fold	A4R (60 to 105 g/m ²)
	Z-Fold	A3, B4, A4R (60 to 105 g/m ²)
Document Insertion	Document Insertion	A3, B4, A4, A4R, B5, B5R (60 to 256 g/m ²)
Paper Capacity	100 sheets (80 g/m ²)	
Tray Capacity	C-Fold	40 sheets (80 g/m ²)/Interpolated 60 mm in height
	Z-Fold	30 sheets (A3, B4), 10 sheets (A4R) Output from Staple Finisher or Booklet Finisher
Power Source/Maximum Power Consumption	100 V AC, 15 A, Common to 50 Hz and 60 Hz (separated from the Main Unit) /170 W or lower	
Dimensions/Weight	662 mm(W) × 679 mm(D) × 1,239 mm(H)/ approx. 76 kg	
Installation Space with Main Unit*	1,960 mm (W) × 770 mm (D)	

* When extending the Stack Bypass to the maximum length

Staple Finisher-P1 (Option)		
Paper Size	Based on the specifications of Main Unit	
Paper Weight	52 to 256 g/m ²	
Paper Type	Thin, Plain, Recycled, Color, Pre-punched, Heavy1 (91 to 180 g/m ²), Heavy2 (181 to 220 g/m ²), Heavy3 (221 to 256 g/m ²), Tracing, Labels, Transparency, etc.	
Tray Capacity	Escape Tray	Non-collate: 250 sheets (A4, B5, A5R: interpolated 43 mm in height) 125 sheets (A3, B4, A4R, B5R: interpolated 21 mm in height)
	Upper Tray	Non-collate: 1,300 sheets (A4, B5, A5R: interpolated 188 mm in height) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in height) Collate, Group* ¹ : 1,300 sheets (A4, B5: interpolated 188 mm in height) 650 sheets (A3, B4, A4R: interpolated 96 mm in height) Staple: 1,300 sheets/100 copies (A4, B5: interpolated 188 mm in height) 650 sheets/50 copies* ¹ (A3, B4, A4R: interpolated 96 mm in height)
	Lower Tray	Non-collate: 2,450 sheets (A4, B5: interpolated 347 mm in height) 1,700 sheets (A5R: interpolated 243 mm in height) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in height) Collate, Group: 1,700 sheets (A4, B5: interpolated 243 mm in height) 650 sheets* ¹ (A3, B4, A4R: interpolated 96 mm in height) Staple: 1,300 sheets/100 copies (A4, B5: interpolated 188 mm in height) 650 sheets/50 copies* ¹ (A3, B4, A4R: interpolated 96 mm in height)
	Staple	Maximum Capacity:25 copies (depending on the size and the number of pages) 1 to 5 sheets/25 copies, 6 to 10 sheets/15 copies, 11 to 16 sheets/10 copies
Staple Position	Capability	Corner/Double
	Position	Corner/Double
Paper Size for Shifting	A3, B4, A4, A4R, B5	
Paper Size for Staple	A3, B4, A4, A4R, B5	
Maximum Power Consumption	Main Unit/approx. 147 W (with External 2 Hole Puncher-A1), approx. 136 W (without External 2 Hole Puncher-A1)	
Dimensions/Weight	761 mm(W) × 656 mm(D) × 1,121 mm(H) (When extending auxiliary tray)/approx. 48 kg	
Installation Space with Main Unit* ²	1,708 mm (W) × 770 mm (D)	


*1 Including mixed size sheets. *2 When extending the Stack Bypass and Finisher Tray to the maximum length

Booklet Finisher-P1 (Option)		
Paper Size	Based on the specifications of Main Unit	
Paper Weight	52 to 256 g/m ²	
Paper Type	Thin, Plain, Recycled, Color, Pre-punched, Heavy1 (91 to 180 g/m ²), Heavy2 (181 to 220 g/m ²), Heavy3 (221 to 256 g/m ²), Tracing, Labels, Transparency, etc.	
Tray Capacity	Escape Tray	Non-collate: 250 sheets (A4, B5, A5R: interpolated 43 mm in height) 125 sheets (A3, B4, A4R, B5R: interpolated 21 mm in height)
	Upper Tray	Non-collate: 1,300 sheets (A4, B5, A5R: interpolated 188 mm in height) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in height) Collate, Group* ¹ : 1,300 sheets (A4, B5: interpolated 188 mm in height) 650 sheets (A3, B4, A4R: interpolated 96 mm in height) Staple: 1,300 sheets/100 copies (A4, B5: interpolated 188 mm in height) 650 sheets/50 copies* ¹ (A3, B4, A4R: interpolated 96 mm in height)
	Lower Tray	Non-collate: 2,450 sheets (A4, B5: interpolated 347 mm in height) 1,700 sheets (A5R: interpolated 243 mm in height) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in height) Collate, Group: 1,700 sheets (A4, B5: interpolated 243 mm in height) 650 sheets/50 copies* ¹ (A3, B4, A4R: interpolated 96 mm in height) Staple: 1,300 sheets/100 copies (A4, B5: interpolated 188 mm in height) 650 sheets/50 copies* ¹ (A3, B4, A4R: interpolated 96 mm in height)
	Saddle Stitching* ³	Maximum Capacity:25 copies (depending on the size and the number of pages) 1 to 5 sheets/25 copies, 6 to 10 sheets/15 copies, 11 to 16 sheets/10 copies
Staple	Capability/ Position	Corner/Double:52 to 81 g/m ² :50 sheets, 82 to 105 g/m ² :30 sheets, 106 to 220 g/m ² :2 sheets (A4, B5), 52 to 81 g/m ² :30 sheets, 82 to 105 g/m ² :20 sheets, 106 to 220 g/m ² :2 sheets (A3, B4, A4R)
	Capability/ Position	Saddle Stitching:52 to 81 g/m ² :16 sheets, 82 to 105 g/m ² :10 sheets, 106 to 150 g/m ² :5 sheets, 151 to 209 g/m ² :4 sheets (A3, B4, A4R)
Paper Size for Shifting	A3, B4, A4, A4R, B5	
Paper Size for Staple	A3, B4, A4, A4R, B5	
Maximum Power Consumption	Main Unit/approx. 155 W (with External 2 Hole Puncher-A1), approx. 143 W (without External 2 Hole Puncher-A1)	
Dimensions/Weight	761 mm(W) × 656 mm(D) × 1,121 mm(H) (When extending auxiliary tray)/approx. 72 kg	
Installation Space with Main Unit* ²	1,708 mm (W) × 770 mm (D)	

*1 Including mixed size sheets. *2 When extending the Stack Bypass and Finisher Tray to the maximum length. *3 Punched pages not to be book-finished


Useful utility software Support your operation using Driver CDCT*

Using CDCT (Canon Driver Configuration Tool), you can change the default settings of Canon printer drivers to meet the needs.



Maintain Address Book from your desk Address Book Editor*

Users can easily edit Address Book on their computer by loading data from iR-ADV or CSV files. Easy to import it using Remote UI.



Efficiently convert fax documentation into electronic data File Automatic Organize Tool*

Sort received fax documents in Advanced Box into a folder that is created by date automatically and stored.

ENVIRONMENT

Power Reducing and High Productivity

Low power consumption design

While improving the high-speed specifications, the unit balances superb productivity with energy saving and boasts a TEC*¹ (an indicator of low energy consumption) of 6.08kWh.*² Moreover, it uses less than one watt of power in sleep mode.

Environmental Consciousness Backed with Long Duration / Low Power Use

LED Lighting

LED lighting is used to backlight the LCD. The lighting efficiency is greatly improved by raising the brilliance of the light guides.

Wide-ranging Response to Environmental Needs

Compliance with standards

The iR-ADV is compliant with the Ecomark, the International ENERGY STAR Program, and the Law on Promoting Green Purchasing. It is also compliant with the RoHS Directive, which bans the use of six hazardous materials.



Contribute to a Cleaner Environment

Bio-based Plastic*³

Bio-based plastic certified by the Japan BioPlastics Association is used for the touch pen, which your hand will touch each time you use the printer, the buttons and part of the exterior plastic castings.



*¹ Figures from measurement methods defined under the International ENERGY STAR Program. *² For the iR-ADV 6275.

*³ Plant based plastics designed to reduce environmental footprint. Exterior plastic castings have achieved 5V classification under the UL 94 Flammability Standard.

Supports Remote Control for Stable Operation

NETEYE *Contract is required separately (gratis)

This on-line support system detects the main unit's situation via the internet and carries out prompt maintenance. Able to automatically update to the latest version for main unit software.



Provides the Optimal Document Environment

onBIZZ *Contract is required separately (non-gratis)

This total support service provides the optimal document environment. It contributes to cost reduction and productivity.



Product Lineup



6275

- Copy/print speed 75ppm
- First-Copy-Out time (FCOT) .. 3.1sec.
- Scan speed (A4,landscape,2-sided,at a resolution of 300dpi)
- COLOR 100ipm
- BLACK & WHITE 200ipm

When the optional Booklet Finisher P1, External 2 Hole Puncher-A1, Document Insertion/ Folding Unit-H1, Paper Deck Unit-D1 are attached.



6265

- Copy/print speed 65ppm
- First-Copy-Out time (FCOT) .. 3.3sec.
- Scan speed (A4,landscape,2-sided,at a resolution of 300dpi)
- COLOR 100ipm
- BLACK & WHITE 200ipm

When the optional Staple Finisher-P1, External 2 Hole Puncher-A1, Paper Deck Unit-A1 are attached.



6255

- Copy/print speed 55ppm
- First-Copy-Out time (FCOT) .. 3.3sec.
- Scan speed (A4,landscape,2-sided,at a resolution of 300dpi)
- COLOR 100ipm
- BLACK & WHITE 200ipm

When the optional Copy Tray-Q1 are attached.

Main Unit pricing (w/o tax)

6275 3,100,000 yen 6255 2,500,000 yen
6265 2,800,000 yen

* The Duplex Color Image Reader Unit-G1 included.

For product information,



Canon Marketing Japan Corporate Information (English)

canon.jp/8060e

This on-line support system detects the main unit's situation via the internet and carries out prompt maintenance.



*Product information can also be checked from a mobile device.

Built-in Service Technician Tools

The imageRUNNER ADVANCE Series provides the following built-in service technician tools designed for prompt delivery of required services when trouble occurs. Service technicians use these tools upon customer's assent.

- Service Technician Browser: Accesses the device web portal and views troubleshooting and countermeasure examples and other relevant information at a customer site.
- Updater: Downloads the latest firmware over the Internet at a customer site.

●Design and specifications are subject to change without notice, due to product improvements. The contents of this brochure are based on the design and specifications as of October, 2012. ●The pricing does not include photosensitive unit and consumables pricing as well as the corresponding consumption tax for each accessory. Consumption taxes will be added when you purchase the main unit, optional accessories, or consumables or when you ask your service technician for assistance. ●Maintenance services are required at regular intervals. Ask your sales representative for costs and consumables pricing. ●Performance components which are part of required maintenance services will be kept in store for a minimum of 7 years after the product went out of production. (Performance components are components required to maintain product performance.) ●Microsoft, Windows, and Windows Vista are trademarks of Microsoft Corporation, registered in the US and other countries. ●Apple and Macintosh are trademarks of Apple Computer, Inc., registered in the US. ●Adobe, PostScript, PostScript 3, and the PostScript logo are trademarks of Adobe Systems Incorporated, registered in the US. ●IPX/SPX is a trademark of Novell Inc., registered in the US. ●Canon, the Canon logo, imageRUNNER, Satera, and imageWARE are registered trademarks of Canon Inc. ●BMLinkS is the registered trademark of the Japan Business Machine and Information System Industries Association. ●All other trademarks are the property of their respective owners. ●Copy samples provided in this brochure may differ from actual output. ●Screenshots provided in this brochure are edited.

Warning:

- Possession of copies may be subject to punishment for violation of the law. These include:
 - ① Counterfeits in circulation within and outside this country, government securities, and government and regional bond certificates
 - ② Unpaid postal stamps and postcards
 - ③ Duplicated government stamps
- Copying copyrighted material, such as books, music, paintings, black prints, maps, movies, drawings, or photos, is prohibited except for personal, family, or other limited use.
- A designated administrator is required for management and control of this product to prevent unauthorized copying.



To use the product safely:

- Before using the product, read the product documentation carefully and thoroughly.
- Use the product only within the specified output power and input voltage.



●Purchase Canon products at our store that you can always trust.

As of October, 2012

Canon Canon Inc.
Canon Marketing Japan Inc.

CANON TOWER 2-16-6 Konan, minato-ku, Tokyo, 108-8011 Japan