

# Outstanding productivity and high-quality output

imageRUNNER ADVANCE  
C7260i, C7270i, C7280i

you can

60-80 PPM MONO  
/ 55-70 PPM COLOUR

21.3 CM TOUCH SCREEN

PAPER CAPACITY UP TO 6,900  
OR 9,300 SHEETS

MEDIA UP TO 300 GSM,  
SIZE UP TO SRA3

SUPERB PRINT QUALITY

PROFESSIONAL FINISHING

These devices keep pace with the toughest office schedules, delivering performance and quality with professional finishing. Powerful security and unbeatable environmental credentials combine for a future-proof investment.



## Productivity and quality hand in hand

- Unrivalled user experience through a large 21.3 cm (8.4 inch) colour touch-screen
- Personalisation through user-defined one-touch buttons to simplify and automate common tasks
- A 300-sheet one-pass duplex scanner captures paper documents at speeds of up to 200 ipm
- Standard support for data formats such as Searchable PDF and Office Open XML (PowerPoint and Word) enables re-use and re-purpose of digital content
- True 1200 x 1200 dpi resolution, pQ toner and automatic colour adjustment ensure great image quality
- Optional Fiery-based ColorPASS-GX400 or imagePASS-A2 controllers enhance processing, job management, workflow automation and accurate colour reproduction
- Professional finishing options staple, saddle stitch, punch, trim, fold and insert for versatile document creation
- Support for mobile working.

## Cost Control

- Scalability allows the device to adapt to your changing needs
- User activity tracking provides visibility of print behaviour
- Apply policies and restrict usage at function level by user
- Cost centre job accounting and rule-based routing for cost optimisation with uniFLOW
- Efficient device monitoring, reporting and diagnostics for proactive maintenance and maximum uptime.

## Device and Information Security

- Smart user authentication enables controlled device access without impacting convenience
- Disable functions per user to prevent unauthorised usage
- Secure print and Mailbox ensure document confidentiality
- A variety of standard and optional security features protects device, network and documents
- Integrates with uniFLOW Data Loss Prevention solution providing auditing of prints, scans, copies and faxes.

 **imageRUNNER**  
ADVANCE

**Canon**

## Integration

- Integrates seamlessly into your network and enterprise solution
- Collaborates with business applications and external systems in the Cloud such as Google Drive™
- Through the embedded MEAP platform the device integrates tightly with a range of powerful capture and document management solutions such as uniFLOW or eCopy
- Easily configure, manage and upgrade your device, whether individually, or as part of a larger fleet using Canon's device management tools.


## Sustainability

- Class leading Typical Electricity Consumption (TEC\*) ratings
- Consumes as little as 0.9 W in sleep mode
- Incorporates recycled materials and bio-plastics
- ENERGY STAR® qualified.

### Configuration options for C7260i/7270i



### Configuration options for C7280i

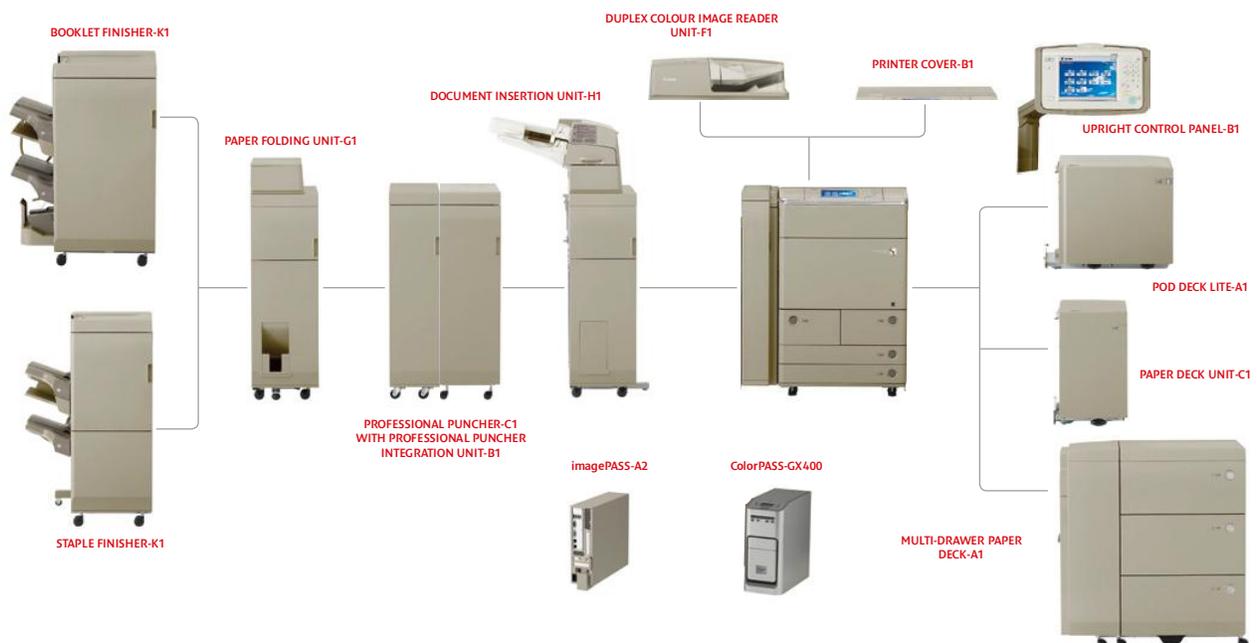

**Canon**

For full details of all options, please refer to the product specifications.

\*Defined by ENERGY STAR (<http://www.eu-energystar.org>)

# Specifications: imageRUNNER ADVANCE C7200 series

Machine type	Colour Laser Multifunctional (Reader/Printer separated)
Available Core functions	Print, Copy*, Scan*, Send* and Optional Fax* * Requires DUPLX COLOUR IMAGE READER UNIT-F1 Printer only version requires PRINTER COVER-B1
<b>PRINTER SPECIFICATIONS</b>	
Print speed (BW/CL)	iR-ADV C7260i: 60/55 ppm (A4), 30/27.5 ppm (A3), 4.2/3.9 ppm (A4R), 60/55 ppm (A5R) iR-ADV C7270i: 70/65 ppm (A4), 35/32.5 ppm (A3), 4.9/4.6 ppm (A4R), 70/65 ppm (A5R) iR-ADV C7280i: 80/70 ppm (A4), 40/35 ppm (A3), 5.6/4.9 ppm (A4R), 80/70 ppm (A5R)
Printing method	Colour Laser Beam Printing
Print resolution	1200 dpi x 1200 dpi, 600 dpi x 600 dpi
Double sided printing	Automatic (Standard)
Printing from memory media	Supported memory media: USB memory key, Memory cards (SD, Compact Flash and Memory Stick via optional MULTIMEDIA READER/WRIITER-A2) Supported file types for direct printing: JPEG, TIFF, PDF*, XPS* (*Requires PS PRINTER KIT-AS1 for PDF, or DIRECT PRINT KIT (for PDF/XPS)-H1 for PDF/XPS. XPS direct print from removable media is not available.)
Printing from mobiles or internet-connected devices and cloud-based services	A range of software and MEAP-based solutions is available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Paper input (Standard)	2 x 1100-sheet cassettes, 2 x 550-sheet cassettes (80 gsm) and 100-sheet multi-purpose tray
Paper input (Option)	1 x 3500-sheet side paper deck (A4) (PAPER DECK UNIT-C1) 1 x 3500-sheet side paper deck (A4/A3) (POD DECK LITE-A1) 1 x 6000-sheet multi-drawer paper deck (A4/A3) (MULTI-DRAWER PAPER DECK-A1) for iR-ADV C7280i only
Maximum paper input capacity (with options)	iR-ADV C7260i/7270i: 6900 sheets (A4), 4500 sheets (A3) iR-ADV C7280i: 9300 sheets (A4), 7100 sheets (A3)
Paper output capacity	iR-ADV C7260i/7270i: With Finisher: 4000 sheets (A4, 80 gsm) iR-ADV C7280i: With Finisher: 4250 sheets (A4, 80 gsm)
Finishing capabilities	iR-ADV C7260/7270i: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Insertion, Fold (C-/Z-fold) iR-ADV C7280i: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch (multiple patterns), Trimming, Insertion, Fold (C-/Z-/Half/Double parallel/Accordion-Z fold)
Supported media types	Cassettes: Thin, Plain, Recycled, Colour, Heavy, Pre-punched, Tab, Bond, Letterhead Multi-purpose tray: Thin, Plain, Recycled, Colour, Heavy, Coated, Pre-punched, Tab, Bond, Transparency, Label, Envelopes, Letterhead Optional Paper decks: Thin, Plain, Recycled, Colour, Heavy, Pre-punched, Coated*, Textured*, Bond*, Transparency*, Labels*, Letterhead*, Tab** *Requires A30 DECK LITE-A1 for iR-ADV C7260/7270i **Requires POD DECK LITE-A1 or MULTI-DRAWER PAPER DECK-A1 for iR-ADV C7280i *** Requires MULTI-DRAWER PAPER DECK-A1 for iR-ADV C7280i
Supported media sizes	Paper cassettes: 1, 2, A4 Paper cassette 3, A, A4, A4R, A5, A5R, A3, SRA3, 13" x 19" (330 mm x 483 mm), Free size 1357 mm x 182 mm to 330.2 mm x 487.7 mm Multi-purpose tray: A4, A4R, A5, A5R, A3, SRA3, 13" x 19" (330 mm x 483 mm), Free size 100 mm x 148 mm to 330.2 mm x 487.7 mm Envelopes: No. 10 (COM10), Monarch, ISO-C5, DL
Supported media weights	Cassettes: 52 to 220 gsm, Multi-purpose tray: 52 to 300 gsm, Duplex: 52 to 220 gsm
Page Description Language(s)	UFRII/PCL (Standard), Adobe PostScript Level 3 (requires PS PRINTER KIT-AS1)
Fonts	PCL fonts: 93 Roman, 10 Bitmap, 2 OCR fonts, Android Mono WT J/K/S/T/P (Japanese, Korean, Simplified and Traditional Chinese) *Requires optional PCL INTERNATIONAL FONT SET-A1 PS fonts: 136 Roman
Operating System compatibility	UFRII: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8, MAC OS X (10.4.9 or later) PCL: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8 PS: Windows XP/Server 2003/Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8, MAC OS X (10.4.9 or later), PPD: MAC OS 9.1 or later, MAC OS X (10.2.8 or later), Windows Server 2003/Server 2008/XP/Vista/Windows 7/Windows 8 Please refer to <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a> for availability of print solutions for other operating systems and environments including AIX/400, UNIX, Linux and Citrix Some of these solutions are chargeable SAP Device Types are available via the SAP Market Place
<b>COPY SPECIFICATIONS</b>	
Copy speed	Please refer to the quoted print speeds
First Copy Output Time (FCOT)	iR-ADV C7260i: Approx. 4.9/6.6 seconds (BW/CL) iR-ADV C7270i: Approx. 4.9/6.6 seconds (BW/CL) iR-ADV C7280i: Approx. 4.4/6.0 seconds (BW/CL)
Copy resolution	Reading: 600 dpi x 600 dpi Printing: 1200 dpi x 1200 dpi Up to 999 copies
Multiple copy Reduction / Enlargement	Zoom: 25-400% in 1% increments Fixed Zoom Ratio: 25%, 50%, 70%, 100%, 141%, 200%, 400%

<b>FIERY PRINT CONTROLLER SPECIFICATIONS</b>	
Optional/Standard	Optional
Name	imagePASS-A2 (embedded), ColorPASS-CX400 (external)
Page Description Language(s)	Adobe PostScript v. 3019 Enhanced PCL6/PCL5 (imagePASS-A2 only) FreeForm v. 1 enhanced and v. 2.1 PPML GA v. 2.2 (ColorPASS-CX400 only) Adobe PDF Print Engine (ColorPASS-CX400 only)
Memory	imagePASS-A2: 2 GB ColorPASS-CX400: 2 GB
Hard Disk Drive	imagePASS-A2: 160 GB SATA ColorPASS-CX400: 500 GB SATA
Processor Speed	imagePASS-A2: Intel E5300 2.6GHz ColorPASS-CX400: Intel Core i5 660 3.6 GHz
Fonts	138 Adobe PS fonts installed, double byte font support
Fiery System Version/platform	imagePASS-A2: Sys 10e/E/... ColorPASS-CX400: Sys 10/PROB0-3
Interface	1000/100/10Mbps, USBx8 (Front x 2, Rearx 6) (ColorPASS-CX400), USBx4 (imagePASS-A2)
Network protocols	TCP/IP, AppleTalk, Bonjour, SNMP, IPP, FTP, SMB, NTP, IPv6
<b>SCAN SPECIFICATIONS</b>	
Optional/Standard	Optional DUPLX COLOUR IMAGE READER UNIT-F1: Colour flatbed scan unit and 300-sheet duplex automatic document feeder (One-Pass Duplex Scan)
Supported media size/s	A3, A4, A4R, A5, A5R, Free size (W x L): 139.7 mm x 129 mm to 432 mm x 304.8 mm
Supported media weight/s	Single-sided scanning: 38 to 220 gsm, Double-sided scanning: 50 to 220 gsm
Scan resolution	100 dpi, 150 dpi, 200 x 100 dpi, 200 dpi, 300 dpi, 200 x 400 dpi, 400 dpi, 600 dpi
Double sided scanning	2-sided to 2-sided (Automatic)
Scan speed	Single-sided (A4, 300 dpi): (BW/CL) 120/120 ipm Double-sided (A4, 300 dpi): (BW/CL) 200/140 ipm Single-sided (A4, 600 dpi): (BW/CL) 120/70 ipm Double-sided (A4, 600 dpi): (BW/CL) 120/70 ipm
Scan methods	Push Scan: Send functionality available on all models Pull Scan: TWAIN/WIA Pull scanning available on all models Scan to USB Memory Key: Available on all models Scan to Mobiles, internet-connected devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices, internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN via Network TWAIN Driver (Colour Network ScanGear): Supported OS: Windows 2000/Windows XP/Windows Server 2003/Windows Vista/Windows Server 2008/Windows 7/Windows 8 (32 bit, 64 bit in compatibility mode) WIA via Network WIA Driver: Supported OS: Windows Vista/Windows Server 2008/Windows 7/Windows 8 (32 bit, 64 bit)* * Drivers are available via <a href="http://software.canon-europe.com/">http://software.canon-europe.com/</a>
Pull scan specifications	
<b>SEND SPECIFICATIONS</b>	
Optional/Standard	Available with DUPLX COLOUR IMAGE READER UNIT-F1
Send resolution	100 dpi, 150 dpi, 200 x 100 dpi, 200 dpi, 300 dpi, 200 x 400 dpi, 400 dpi, 600 dpi
Destinations	E-Mail/Internet FAX (SMTP), PC (SMB, FTP), WebDAV, Google Drive with iR-ADV Cloud Connect MEAP application
Address Book/ Speed dials	LDAP (1000)/Local (Max. 500)
File formats	TIFF, JPEG, PDF, XPS, High compression PDF/XPS, PDF/A-1b, Searchable PDF/XPS, Office Open XML (PowerPoint, Word)
Optional Universal Send Feature Sets	UNIVERSAL SEND ADVANCED FEATURE SET-E1: Create outline PDF (Trace and Smooth), Adobe Reader Extensions PDF UNIVERSAL SEND SECURITY FEATURE SET-D1: Send encrypted PDF, and add digital device signature to PDF/XPS files UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1: Add digital user signature to PDF/XPS files
<b>FAX SPECIFICATIONS</b>	
Optional/Standard	Optional on all models (requires SUPER G3 FAX BOARD-AD2)
Modem speed	Super: G3 33.6kbps (Up to 3 sec/page) (see footnote 1)
Fax resolution	Standard: 200 x 100 dpi Fine: 200 x 200 dpi Super fine: 200 x 400 dpi Ultra fine: 400 x 400 dpi
FAX memory	Up to 6000 pages (see footnote 1)
Speed dials	Max 200
Group dials/destinations	Max 199 dials
Sequential broadcast	Max 256 addresses from the address book plus new 256 destinations
Memory backup	3 hours
Other features	Fax Forwarding, Dual Access, PC Fax (TX only)
<b>GENERAL SPECIFICATIONS</b>	
Warm-up Time	Approx. 31 sec from power ON (Normal mode), 7 seconds from power ON (Quick Start mode)
Interface type	USB 2.0 Hi-speed, Ethernet 1000BaseT/100Base-T, 2 x USB Host
Network protocols	TCP/IP* (LPI/Port 9100/ANSI/IPP/PPS/SMB/FTP), IPP/SOX (DNS, Bindery), AppleTalk* *IPv4/IPv6 support
Processor Speed	1.8 GHz
Memory	2.5 GB
Hard Disk Drive	Standard 320 GB Hard Disk Drive (usable space 160 GB), expandable to 1TB
Control panel	21.3 cm (8.4 inch) TFT SVGA Colour Touchscreen (Standard), 26.4 cm (10.4 inch) Upright Colour SVGA Control Panel (Optional)

Dimensions (W x D x H)	689 mm x 932 mm x 1221 mm (with DUPLX COLOUR IMAGE READER UNIT-F1)
Installation space (W x D)	iR-ADV C7260i/7270i: Standard configuration: 2320 mm x 1450 mm (with BOOKLET FINISHER-L1 AND PAPER DECK UNIT-C1) Full-optional: 2850 mm x 1450 mm (with POD DECK LITE-A1, BOOKLET FINISHER-L1 and INSERT/FOLD UNIT-F1) iR-ADV C7280i: Standard configuration: 2621 mm x 1450 mm (with BOOKLET FINISHER-K1 and POD DECK LITE-A1) Full-optional: 3977 mm x 1450 mm (with MULTI-DRAWER PAPER DECK-A1, BOOKLET FINISHER-K1, DOCUMENT INSERTION UNIT-H1, PAPER FOLDING UNIT-G1 and PROFESSIONAL PUNCHER-C1 (including INTEGRATION UNIT-B1))
Weight	Approx. 282 kg (with DUPLX COLOUR IMAGE READER-F1)
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity: 20 to 80% RH (no condensation)
Power Source	iR-ADV C7260i/7270i: 220-240 V (±10%), 50/60 Hz (±2 Hz), 10A iR-ADV C7280i: 220-240 V (±10%), 50/60 Hz (±2 Hz), 15A
Power Consumption	iR-ADV C7260i/7270i: Maximum: Approx. 2 kW/2.5 kW Standby: Approx. 200 W Sleep mode: Approx. 0.9 W (see footnote 2) TEC rating (see footnote 3): 4.2 kWh/4.9 kWh iR-ADV C7280i: Maximum: Approx. 2.5 kW Standby: Approx. 200 W Sleep mode: Approx. 0.9 W (see footnote 2) TEC rating (see footnote 3): 5.6 kWh
Noise Levels	Sound Pressure (see footnote 4) Active: BW/CL: iR-ADV C7260i: 57 dB, iR-ADV C7270i: 58 dB, iR-ADV C7280i: 58 dB Standby: iR-ADV C7260i: 35 dB, iR-ADV C7270i: 35 dB, iR-ADV C7280i: 33 dB
Software and printer management	M Management Console for centralised management of the device (consumables and error monitoring and alerts, address book, configuration and firmware updating, MEAP applications distribution, meter capture, driver and resource management). Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management and remote diagnostics). Content Delivery System (Remote distribution of firmware, iR options and MEAP applications), Canon Driver Configuration Tool, Remote User Interface (RUI), Network ScanGear, NetSpot Device Installer, MEAP (Multifunctional Embedded Application Platform), MEAP Web Standard, IPP/Max Address Filtering, IPSEC, SNMP V3.0, IEEE 802.1X Trusted Platform Module (TPM), Secure Print, HDD Password Lock, HDD Erase, Universal Login Manager, Department ID, SSO-H, Mailbox Access Management System, Optional: Encrypted Secure Print, Encrypted PDF, HDD Mirroring and Encryption, User and Device signatures, Secure Watermarks, Document Scan locking, HDD removal The following items require unFLOW My Print Anywhere secure print, Data Loss Prevention.
Security Features	
<b>CONSUMABLES</b>	
Toner Cartridge/s	C-EXV 31 TONER BK/CY/MG/YL (yield: 80000 pages (B), 52000 pages (CY/MG/YL) (see footnote 5))
<b>SPECIFICATIONS FOR OPTIONS</b>	
Staple/Booklet Finisher 1	<b>STAPLE FINISHER-L1/BOOKLET FINISHER-L1 for iR-ADV C7260i/7270i</b> Number of Trays: 3 Tray Capacity: Upper tray (A): A4/A5R 250 sheets, A3/A4R 125 sheets Middle tray (B): A4/A5R 1300 sheets, A3/A4R 650 sheets Lower tray (C): A4 2450 sheets, A4R 1700 sheets, A3/A4R 650 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double, Booklet Stitch (booklet finisher only) Staple Capacity: A4 50 sheets; A3/A4R 30 sheets Booklet Stitch paper size (booklet finisher only): A3, A4R Booklet Stitch Staple Capacity (booklet finisher only): 16 sheets (64 pages, 80 gsm) Dimensions (W x D x H): 761 mm x 656 mm x 1121 mm (with extended tray) 646 mm x 656 mm x 1121 mm (when tray is closed) Weight: Approx. 48 kg (staple finisher), 72 kg (booklet finisher)
Staple/Booklet Finisher 2	<b>STAPLE FINISHER-K1/BOOKLET FINISHER-K1 for iR-ADV C7280i</b> Number of Trays: 3 Tray Capacity: Upper tray (A): A4/A5R 250 sheets, A3/A4R 125 sheets, SRA3/13" x 19" 30 sheets Middle tray (B): A4/A5R 1500 sheets, A3/A4R/SRA3/13" x 19" 750 sheets Lower tray (C): A4 3500 sheets, A5R 1500 sheets, A3/A4R/SRA3/13" x 19" 750 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double, Booklet Stitch (booklet finisher only) Staple Capacity: A4 100 sheets, A3/A4R 50 sheets Booklet Stitch paper size (booklet finisher only): A3, A4R, SRA3, 13" x 19", Free size: 210 mm x 279.3 mm to 330.2 mm x 487.7 mm Booklet Stitch Staple Capacity (booklet finisher only): 20 sheets (100 pages, 80 gsm) Dimensions (W x D x H): 782 mm x 765 mm x 1040 mm (with extended tray) 654 mm x 765 mm x 1040 mm (when tray is closed) Weight: Approx. 64 kg (staple finisher), 110 kg (booklet finisher)
Booklet Trimmer	<b>INNER BOOKLET TRIMMER-A1 for iR-ADV C7280i</b> One Edge Trimming (Fore-edge) Trim Width: 2-20 mm Trim Thickness: Up to 20 sheets (includes Cover) Paper Weight: 60 to 300 gsm Weight: Approx. 32 kg

# Specifications: imageRUNNER ADVANCE C7200 series

Paper Deck Unit 1	<p><b>PAPER DECK UNIT-C1 for iR-ADV C7260/7270/7280i</b>                  Paper Size: A4                  Paper Weight: 52 to 220 gsm                  Paper Capacity: 3500 sheets (80 gsm)                  Dimensions (W x D x H): 323 mm x 583 mm x 570 mm                  Weight: Approx. 37 kg</p>	Document Folding Unit	<p><b>PAPER FOLDING UNIT-G1 for iR-ADV C7280i</b>                  (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1) Folding:                  Z-fold: Paper Size: A3, A4R, Paper Weight: 52 to 105 gsm                  C-fold: Paper Size: A4R, Paper Weight: 52 to 105 gsm                  Accordion Z-fold: Paper Size: A4R, Paper Weight: 52 to 105 gsm                  Double parallel: Paper Size: A4R, Paper Weight: 52 to 90 gsm                  Half fold: Paper Size: A4R, Paper Weight: 52 to 105 gsm                  Output Capacity: C-Fold and Accordion Z-fold: 40 sheets; Double parallel: 20 sheets                  Dimensions (W x D x H): 336 mm x 793 mm x 1190 mm                  Weight: Approx. 71 kg</p>	System accessories	<p><b>SUPER G3 2ND LINE FAX BOARD-AD1:</b> Add this board to have a second fax line on your device.  <b>REMOTE FAX KIT-A1:</b> Enables the device to connect as a client-to, and send/receive fax through another imageRUNNER ADVANCE device on the network, which is fax enabled.  <b>WEB ACCESS SOFTWARE-H1:</b> Gives you access to web sites and other online content, so you can download and print it without the need for a computer.  <b>SERIAL INTERFACE KIT-K1:</b> (For Cost recovery solution) allows serial communication between 3rd party coin vending devices and Canon's iR-ADV range devices for cost recovery use. An embedded mode (MFP Charge Mode) is enabled in the devices by using Serial Interface Kit-K1.  <b>COPY CONTROL INTERFACE KIT-A1:</b> (For cost recovery solution) allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.</p>
Paper Deck Unit 2	<p><b>POD DECK LITE-A1 for iR-ADV C7260/7270/7280i</b>                  Paper Size: A3, A4, A4R, SRA3, 13"x19"                  Paper Weight: 52 to 300 gsm                  Paper Capacity: 3500 sheets (80 gsm)                  Dimensions (W x D x H): 601 mm x 621 mm x 570 mm                  Weight: Approx. 50 kg</p>	Professional Puncher	<p><b>PROFESSIONAL PUNCHER-C1 for iR-ADV C7280i</b> (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1, and PROFESSIONAL PUNCHER INTEGRATION UNIT-B1)                  Acceptable Punch Paper Weight: 75 to 216 gsm (Plain paper), Pro Click: 75 to 176 gsm                  Acceptable Punch Paper Size: A4                  Punch Tools: Plastic Comb 21-Hole, Twin Loop 23-Hole (Round), Twin Loop 34-Hole (Round), Colour Coil 47-Hole, Velo Bind 12-Hole, Loose Leaf 4-Hole Round Punch, Loose Leaf 2-Hole Round Punch, Loose Leaf 4-Hole (SWE), Loose Leaf 3-Hole, Pro Click 34-Hole                  Dimensions (W x D x H): 305 mm x 792 mm x 1040 mm                  Weight: Approx. 80 kg</p>	Device security accessories	<p><b>HDD DATA ENCRYPTION AND MIRRORING KIT-C1:</b> Hard disk drive accessory pack, providing encryption and mirroring of both temporary and permanent data. Encryption enables copied or scanned images to be encrypted BEFORE they are saved on the device's hard drive. The mirroring function copies all data in real time, providing a highly reliable back-up.  <b>2.5INCH/160GB HDD-G1:</b> Additional HDD for mirroring function.  <b>2.5INCH/1TB HDD-H1:</b> A replacement HDD to increase the storage space on the device. Please note: To use the HDD mirroring function, you need a second 1TB HDD.  <b>REMOVABLE HDD KIT-A1:</b> Allows the physical removal of the Hard Disk Drive when the device is unattended or not in use to protect confidential data and provide a greater level of security.</p>
Paper Deck Unit 3	<p><b>MULTI-DRAWER PAPER DECK-A1 for iR-ADV C7280i</b>                  Paper Size: A3, A4, A4R, A5R, SRA3, 13"x19"                  Paper Weight: 52 to 300 gsm                  Paper Capacity: 2000 sheets x 3 drawers, total 6000 sheets (80 gsm)                  Dimensions (W x D x H): 950 mm x 797 mm x 1040 mm                  Weight: Approx. 150 kg</p>	Puncher Units	<p><b>EXTERNAL 2-HOLE PUNCH UNIT-A1</b>  <b>EXTERNAL 2/4-HOLE PUNCH UNIT-A1</b>  <b>EXTERNAL 4-HOLE PUNCH UNIT-A1 for iR-ADV C7260/7270i</b>                  (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1)                  Punch Hole type:                  EXTERNAL 2-HOLE PUNCH UNIT-A1: 2 holes                  EXTERNAL 2/4-HOLE PUNCH UNIT-A1: 2 holes (FRN) and 4 holes (FRN)                  EXTERNAL 4-HOLE PUNCH UNIT-A1: 4 holes (SWE)                  Acceptable Punch Paper Weight: 52 to 256 gsm                  Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (TEXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4</p>	Document security accessories	<p><b>DOCUMENT SCAN LOCK KIT-B1:</b> Increases document security levels by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing.  <b>SECURE WATERMARK-B1:</b> Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied.  <b>ENCRYPTED PRINTING SOFTWARE-E1:</b> Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.</p>
Puncher Unit/s	<p><b>EXTERNAL 2-HOLE PUNCH UNIT-A1</b>  <b>EXTERNAL 2/4-HOLE PUNCH UNIT-A1</b>  <b>EXTERNAL 4-HOLE PUNCH UNIT-A1 for iR-ADV C7260/7270i</b>                  (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1)                  Punch Hole type:                  EXTERNAL 2-HOLE PUNCH UNIT-A1: 2 holes                  EXTERNAL 2/4-HOLE PUNCH UNIT-A1: 2 holes (FRN) and 4 holes (FRN)                  EXTERNAL 4-HOLE PUNCH UNIT-A1: 4 holes (SWE)                  Acceptable Punch Paper Weight: 52 to 256 gsm                  Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (TEXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4</p>	Puncher Units	<p><b>Punch Unit-BG1/BH1 for iR-ADV C7280i</b>                  (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1)                  Punch Hole type:                  Punch Unit-BG1: 2 holes and 4 holes (FRN) selectable                  Punch Unit-BH1: 4 holes (SWE)                  Acceptable Punch Paper Weight: 52 to 256 gsm                  Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (TEXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4</p>	Document security accessories	<p><b>DOCUMENT SCAN LOCK KIT-B1:</b> Increases document security levels by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing.  <b>SECURE WATERMARK-B1:</b> Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied.  <b>ENCRYPTED PRINTING SOFTWARE-E1:</b> Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.</p>
Puncher Unit/s	<p><b>Punch Unit-BG1/BH1 for iR-ADV C7280i</b>                  (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1)                  Punch Hole type:                  Punch Unit-BG1: 2 holes and 4 holes (FRN) selectable                  Punch Unit-BH1: 4 holes (SWE)                  Acceptable Punch Paper Weight: 52 to 256 gsm                  Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (TEXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4</p>	Print controller accessories	<p><b>BARCODE PRINTING KIT-D1:</b> Enables barcode printing via jet caps technology.  <b>IW DESKTOP:</b> Powerful print publishing software which easily combines documents from different sources, applies finishing to create professional looking documents and seamlessly links to the printer. Includes PDF creation, annotation and compression capabilities for digital workflows such as proofing and authorisation.  <b>X-RITE PRO COLOR LITE:</b> Contains a spectrophotometer for colour measurement, monitor and printer quality control, and supports ICC profile creation for monitors and CMYK printers.  <b>REMOVABLE HDD KIT-B1 (for colorPASS-GX400):</b> Provides the user with the ability to lock the server hard disk drive into the system for normal operation and the ability to remove the drive to a secure location after powering down the server.  <b>STAND AND GUI KIT FOR SERVER:</b> Includes monitor, keyboard, mouse and stand for ColorPASS-GX400.</p>	Document security accessories	<p><b>DOCUMENT SCAN LOCK KIT-B1:</b> Increases document security levels by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing.  <b>SECURE WATERMARK-B1:</b> Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied.  <b>ENCRYPTED PRINTING SOFTWARE-E1:</b> Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.</p>
Document Insertion/Folding Unit	<p><b>DOCUMENT INSERTION/FOLDING UNIT-G1 for iR-ADV C7260/7270i</b> (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1)                  Folding:                  Z-fold: A4R, A3, Paper Weight: 60 to 105 gsm                  C-fold: A4R, Paper Weight: 60 to 105 gsm                  Output Capacity: C-fold 40 sheets                  Number of insertion trays: 1 tray                  Insertion Paper size: A3, A4, A4R, SRA3, 13"x19"                  Insertion Paper Weight: 60 to 256 gsm                  Paper Capacity: 100 sheets x 1 tray (80 gsm)                  Dimensions (W x D x H): 247 mm x 679 mm x 1242 mm                  Weight: Approx. 76 kg</p>	Document Publishing	<p><b>PRODUCTIVITY PACKAGE (for imagePASS-A2):</b> Adds features for advanced job management and productivity in addition to some graphic arts premium edition features. Components include: Hot folders, Postflight, ImageLifter.  <b>GRAPHIC ARTS PACKAGE, PREMIUM EDITION, V.2.2 (for colorPASS-GX400):</b> Provides powerful proofing capabilities and optimised workflow with output simulations for the graphic arts environment.  <b>SEQUENCE IMPOSE:</b> A document imposition solution which is available through Command WorkStation on the FIERY-based controller.  <b>SEQUENCE COMPOSE:</b> A document assembly and composition solution for the FIERY-based controller with WYSIWYG interface, which is available through Command WorkStation.  <b>SEQUENCE SUITE:</b> A package including both Sequence Impose and Sequence Compose</p>	Accessibility accessories	<p><b>ADF ACCESS HANDLE-A1:</b> Attaches to the document feeder, making access easier for seated users.  <b>REMOTE OPERATORS SOFTWARE KIT-B1:</b> Allows use of the device control panel screens from remote computers.  <b>VOICE GUIDANCE KIT-F2:</b> Recorded voice provides confirmation of basic menu settings, making the system easier to use for the visually impaired.  <b>VOICE OPERATION KIT-C2:</b> Enables the user to set various functions on the device using verbal instructions and audible feedback.</p>
Document Insertion Unit	<p><b>DOCUMENT INSERTION UNIT-J1 for iR-ADV C7260/7270i</b>                  (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1)                  Number of trays: 1 tray                  Paper size: A3, A4, A4R, SRA3, 13"x19"                  Paper Weight: 60 to 256 gsm                  Paper Capacity: 100 sheets x 1 tray (80 gsm)                  Dimensions (W x D x H): 247 mm x 679 mm x 1242 mm                  Weight: Approx. 40 kg</p>	EFI-Fiery based controller options	<p><b>REMOVABLE HDD KIT-B1 (for colorPASS-GX400):</b> Provides the user with the ability to lock the server hard disk drive into the system for normal operation and the ability to remove the drive to a secure location after powering down the server.  <b>STAND AND GUI KIT FOR SERVER:</b> Includes monitor, keyboard, mouse and stand for ColorPASS-GX400.</p>	Other options	<p><b>STAMP INK CARTRIDGE-C1</b>  <b>STAPLE CARTRIDGE-D3:</b> Saddle staple cartridge for BOOKLET FINISHER-L1  <b>STAPLE-J1:</b> Plain staple cartridge for BOOKLET FINISHER-L1 and STAPLE FINISHER-L1  <b>STAPLE-N1:</b> Plain staple cartridge for BOOKLET FINISHER-K1 and STAPLE FINISHER-K1  <b>STAPLE-P1:</b> Saddle staple cartridge for BOOKLET FINISHER-K1</p>
Document Insertion Unit	<p><b>DOCUMENT INSERTION UNIT-H1 for iR-ADV C7280i</b> (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1)                  Number of trays: 2 trays                  Paper size: A3, A4, A4R, SRA3, 13"x19", Free size: 182 mm x 182 mm to 330.2 mm x 487.7 mm                  Paper Weight: 52 to 300 gsm                  Paper Capacity: 200 sheets x 2 trays (80 gsm)                  Dimensions (W x D x H): 336 mm x 793 mm x 1407 mm                  Weight: Approx. 61 kg</p>	EFI-Fiery based controller options 2	<p><b>REMOVABLE HDD KIT-B1 (for colorPASS-GX400):</b> Provides the user with the ability to lock the server hard disk drive into the system for normal operation and the ability to remove the drive to a secure location after powering down the server.  <b>STAND AND GUI KIT FOR SERVER:</b> Includes monitor, keyboard, mouse and stand for ColorPASS-GX400.</p>	Other options	<p><b>STAMP INK CARTRIDGE-C1</b>  <b>STAPLE CARTRIDGE-D3:</b> Saddle staple cartridge for BOOKLET FINISHER-L1  <b>STAPLE-J1:</b> Plain staple cartridge for BOOKLET FINISHER-L1 and STAPLE FINISHER-L1  <b>STAPLE-N1:</b> Plain staple cartridge for BOOKLET FINISHER-K1 and STAPLE FINISHER-K1  <b>STAPLE-P1:</b> Saddle staple cartridge for BOOKLET FINISHER-K1</p>
Document Insertion Unit	<p><b>DOCUMENT INSERTION UNIT-H1 for iR-ADV C7280i</b> (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1)                  Number of trays: 2 trays                  Paper size: A3, A4, A4R, SRA3, 13"x19", Free size: 182 mm x 182 mm to 330.2 mm x 487.7 mm                  Paper Weight: 52 to 300 gsm                  Paper Capacity: 200 sheets x 2 trays (80 gsm)                  Dimensions (W x D x H): 336 mm x 793 mm x 1407 mm                  Weight: Approx. 61 kg</p>	EFI-Fiery based controller options 2	<p><b>REMOVABLE HDD KIT-B1 (for colorPASS-GX400):</b> Provides the user with the ability to lock the server hard disk drive into the system for normal operation and the ability to remove the drive to a secure location after powering down the server.  <b>STAND AND GUI KIT FOR SERVER:</b> Includes monitor, keyboard, mouse and stand for ColorPASS-GX400.</p>	Other options	<p><b>STAMP INK CARTRIDGE-C1</b>  <b>STAPLE CARTRIDGE-D3:</b> Saddle staple cartridge for BOOKLET FINISHER-L1  <b>STAPLE-J1:</b> Plain staple cartridge for BOOKLET FINISHER-L1 and STAPLE FINISHER-L1  <b>STAPLE-N1:</b> Plain staple cartridge for BOOKLET FINISHER-K1 and STAPLE FINISHER-K1  <b>STAPLE-P1:</b> Saddle staple cartridge for BOOKLET FINISHER-K1</p>
<p><b>Standard disclaimers</b>                  All specifications subject to change without notice.</p> <p><b>Footnotes</b></p> <ol style="list-style-type: none"> <li>1. Based on ITU-T Standard Chart No. 1</li> <li>2. 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information.</li> <li>3. Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by ENERGY STAR (<a href="http://www.eu-energystar.org">http://www.eu-energystar.org</a>)</li> <li>4. Declared noise emission in accordance with ISO 7779</li> <li>5. Based on 6% coverage</li> </ol>					



Canon Inc.  
 canon.com  
 Canon Europe  
 canon-europe.com  
 English Edition  
 © Canon Europa N.V., 2012